RADA

FRECORD, STREAM AND VIDEOCONFERENCE WITH RADA BRIDGE

HDMI to USB BRIDGE

KEY FEATURES:

4K 30 fps
FHD 120 fps

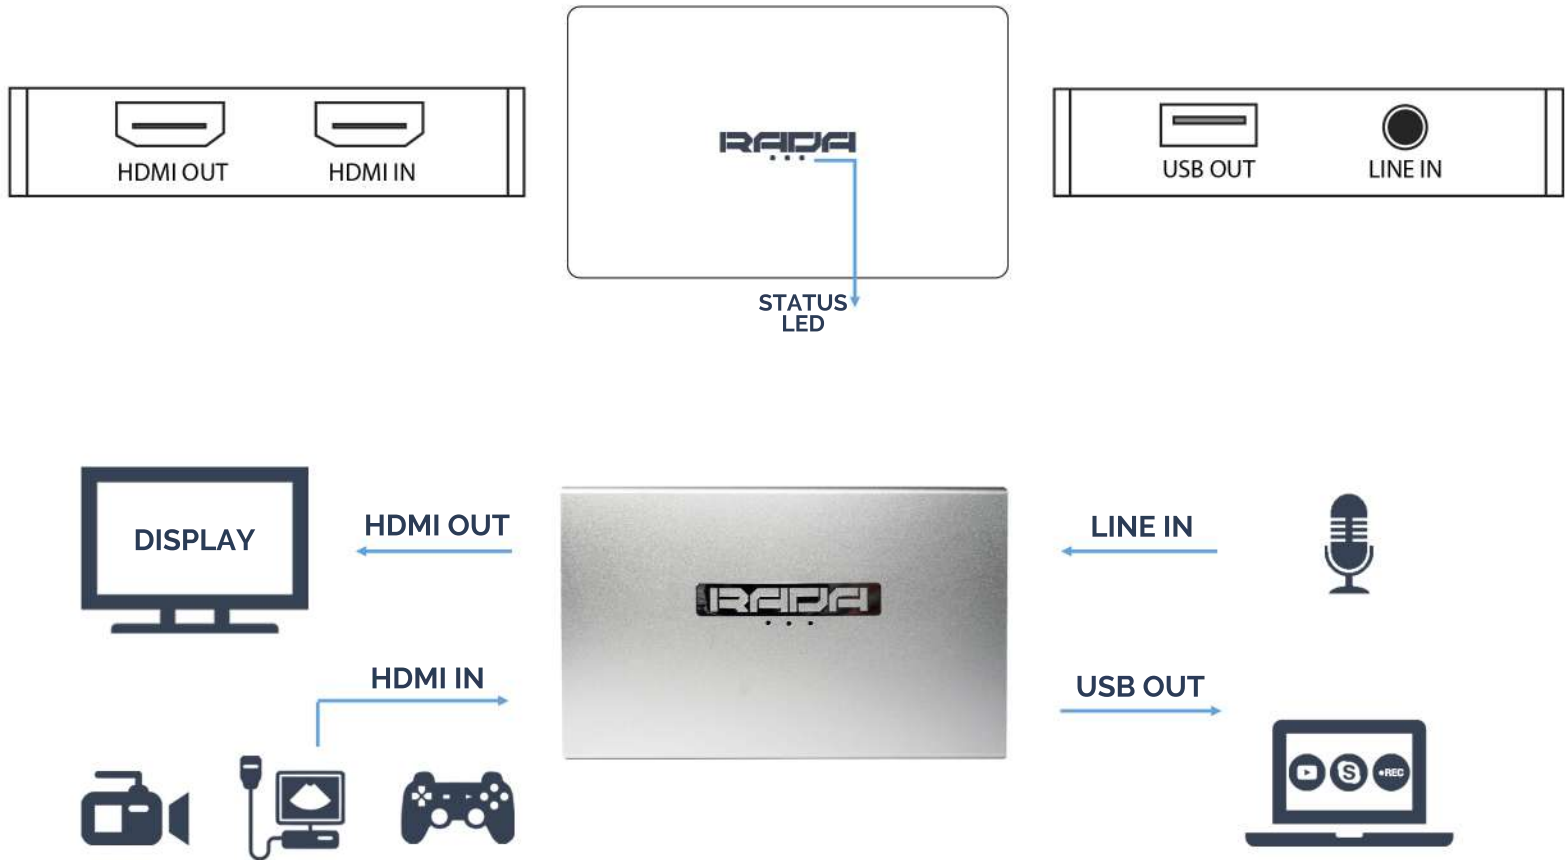High Performance Capture

Plug & Play

No Drivers or Software Needed

Audio & Video

Add audio overlay to original A/V signals

PRODUCT **ARCHITECTURE**

HDMI OUT   HDMI IN

USB OUT   LINE IN

STATUS LED

DISPLAY

HDMI OUT

HDMI IN

LINE IN

USB OUT

TECHNICAL **SPECIFICATIONS**

Model Name	A-BR01
Video	HDMI 1.4. (HDMI In x 1, HDMI Out x 1 - loopthrough), USB 3.0 x 1, (backwards compatible with USB 2.0)
Audio	LINE In x 1 (3.5 mm TRS)
Video Quality	2160P30, 1440P60, 1080P120, 720P60
Power Supply	5V, 1A via USB
Compatibility	Windows 10 x 64, Mac OS High Sierra 10.15 and above. For Zoom Meetings, we recommend to use RADA Bridge S with computers with at least 1.8 GHz Base Processor Frequency to ensure best results.
Working Temperature	0°C to 40°C (32°F to 104°F)
Dimensions	96 x 60 x 15 mm
Weight	127 g
Package Contents	HDMI to USB BRIDGE, USB 3.0 cable Type A, USB Type A to USB Type C adaptor, Quick Installation Guide