

AREC DS-X09 Playout Station

FHD Decoder with HDMI Output



- Select Up to 9 1080p IP Video Sources, Mix and Display via HDMI Output
- H.264/AVC Video Decoding and AAC Audio Decoding
- Customise and Switch Themes Through Free AREC Software



Display Video Sources from Anywhere

The AREC DS-X09 Playout Station is designed to directly decode IP streams, simplifying the process of viewing content on a local display or projector. These streams can be sourced from the local network or the Internet, originating in various locations such as lecture halls, surgery rooms, nature observation chambers, and conference rooms.

Decode, Display, and Stream a Variety of Applications and Locations

Broadcasting Studio



Lecture Stream



Live Surgery



Nature Observation



Educational Video



Conference



Digital Signage



Monitoring





Instantly View and Display IP Streams

DS-X09 enables users to configure a list of up to 96 local and remote network streams using RTMP, RTP, RTSP, and NDI protocols. It can decode and display up to 9 streams simultaneously, presenting them through a customizable single video output. This output can vary in resolution from 640x480 to 1080p30, accessible via the HDMI interface.

* RTSP protocol streams are supported with video only on the DS-X09.





Control Using AREC Multi-view Maker

The AREC Multi-view Maker software for the DS-X09 provides comprehensive control over the video output of the station. The software makes it simple for users to add, mix, and switch between different layout combinations of network sources.




Simple to Use and Integrate


The DS-X09 can be utilized either independently or in conjunction with other devices like AREC Media Stations, where it serves to expand the capacity for simultaneously connected and displayed network sources. On its own, it enables direct streaming to well-known CDNs such as YouTube, Facebook, and others via the RTMP protocol.

Add Streaming Access Points

Thanks to the integrated Live Streaming Server feature, each DS-X09 within the network architecture can function as an additional streaming access point for content delivery. This not only alleviates the load on the origin server, but also enhances the viewing experience for end-users.

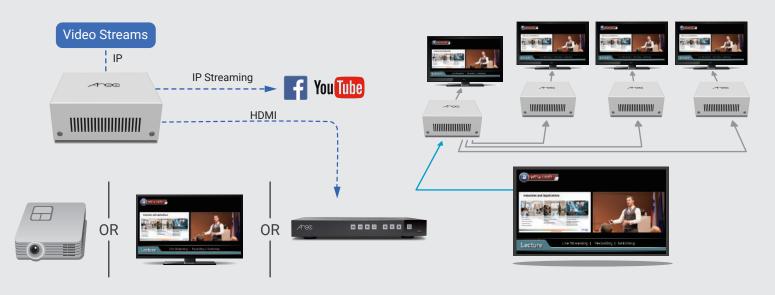

Product Interface and Connection

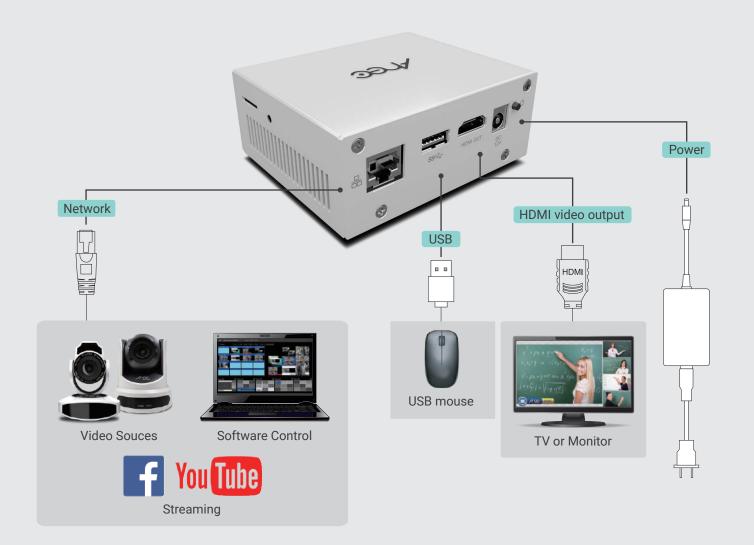

Specifications

Model Name	DS-X09 Playout Station (FHD Decoder)
Video and Audio Inputs	
Inputs Interface	1x RJ-45 (IP streaming): up to 96 streams
Resolution Range	H.264 / AVC, max. 1080p 30fps
Compatible Streaming Input Protocols	RTMP (video+audio) RTP (video+audio) RTSP (video only) NDI HX (video+audio)
Decoding	
Maximum Decode Resolution	Up to 9 channel sources, up to 1920x1080@30fps
Video Compression	H.264/ AVC
Audio Compression	AAC-LC
Live Streaming Server	Embedded RTMP live-streaming server
Streaming Delay	1 sec.
Local Display	
Output Interface	1x HDMI, HDMI 1.4
Output Resolution	HDMI: 1080p30
Control Interface	
Control I/O	1 x USB (Type-A) 1 x 100/1000 Mbps Ethernet (RJ-45)
General Information	
Operation System	Embedded Linux System
Power Supply	12V/3A DC
Power Consumption	25W
Temperature / Humidity	0~40°C/90%
Chassis Material	Metal (Steel)
Chassis Color	White
Dimensions (W×H×D)	95 × 80 × 32mm
Weight	330g
Language	TC/ English
Accessories	Power adapter / quick guide



AREC Inc. | www.arec.com | sales@arec.com

Address: 3F, No. 367, Sec.2, Wenhua RD., Banqiao Dist., New Taipei City 220, Taiwan (R.O.C) TEL: +886-2-8259-5060

Exclusive Representative in Europe, Africa, Latin America and CIS Countries ADENA Limited | www.a-dena.com

E-MAIL: info@a-dena.com TEL: +886-2-8712-1882