




AM-01B

Wireless Audio Receiver

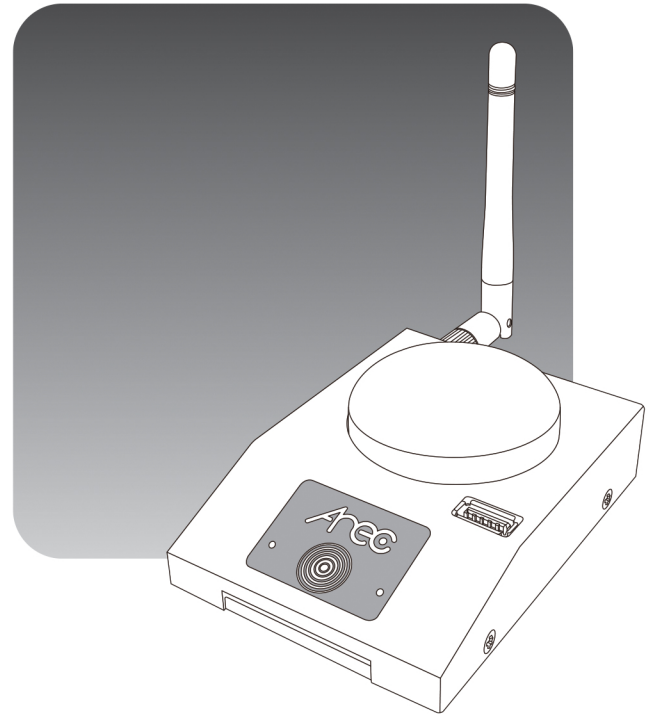

AREC Inc. © All Rights Reserved 2021. | www.arec.com
All information contained in this document is Proprietary




Made in Taiwan
Version:2021-01

AREC AM-01B Wireless Audio Receiver wirelessly gets audio data from AM-600/AM-601 series microphones.

AM-01B's light indicator makes it easy to monitor if the pairing or connecting completes successfully.

- Press the touch panel for 3 seconds to initiate pairing.
- Light indicator will turn blue upon successful pairing. If a paired AM-600 microphone moves out of range, AM-01B's light will turn off.
- Connect with PCs through USB 3.0.
- USB socket can be used to extend AREC Media Station's front USB port function.

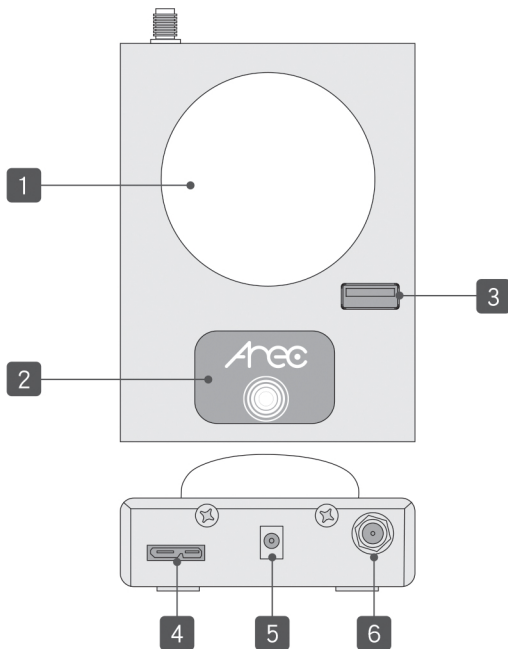

- 1 Pairing Indicator
- 2 One-Touch Pairing
- 3 Top USB Port
- 4 USB 3.0 Micro-B
- 5 Power Supply
- 6 Antenna Port for Wireless Mic

Specifications:

Model Name	AM-01B
Pairing Indicator	Blue Light ON: Paired successfully Blue Light Flashing: In pairing mode Blue Light OFF: No connection
Touch Panel	One touch to start pairing
Audio Input	Audio Antenna for wireless audio receiving Compatible with AREC AM-600/601 wireless microphones.
Audio Output Interface	1 x USB port compatible with AREC Media Stations and PCs.
Top USB Port	1 x USB3.0 Type-A, supports USB memory and other HID devices.
Power Supply	DC-5V
Dimension (L x W x H)	10.0 x 7.5 x 3.9cm
Weight	185g